

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Sito Nuovo 14

29010 Sarmato (PC) - Italy

t +39 0523 8486


e info@jmgcranes.com



Data subject to change without prior notice
Edition 04/2020 © 2020 JMG Cranes S.p.A. All rights reserved
Rev. 1 - 04/2020



Electric
Pick & Carry
Cranes

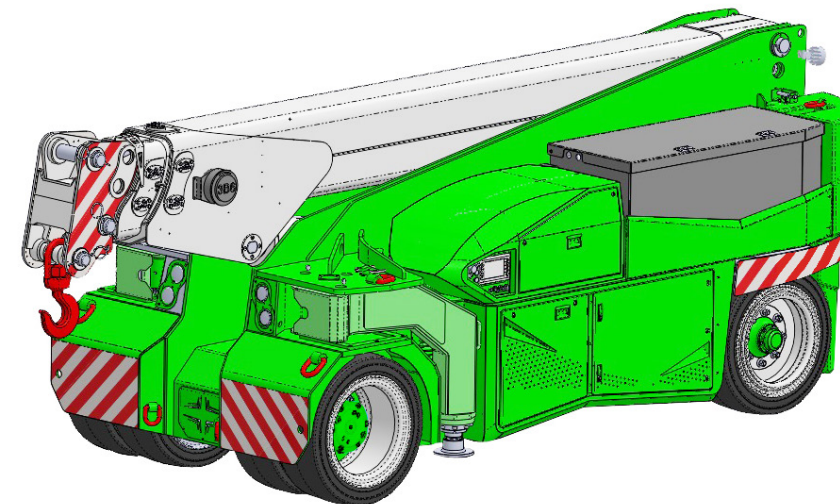

MC 180S (metric)
Max Capacity 18,000 Kg

www.jmgcranes.com

JMG[®]
move to solution

MC 180S

RADIO-REMOTE CONTROL ON DRIVING, STEERING, BOOM MOVEMENTS, WINCH AND OTHER ACCESSORIES

FRONT-WHEELS DRIVE WITH COUNTER ROTATION

REMOVABLE COUNTERWEIGHTS

HYDRAULICALLY TELESCOPING PROPORTIONAL TYPE BOOM


FRONT COMPASS TYPE OUTRIGGERS

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB WITH HYDRAULIC EXTENSION
- BENDABLE MANUAL JIB WITH MANUAL EXTENSION
- NON-MARKING TIRES
- HYDRAULIC FORKS
- MAN BUCKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING



Load charts

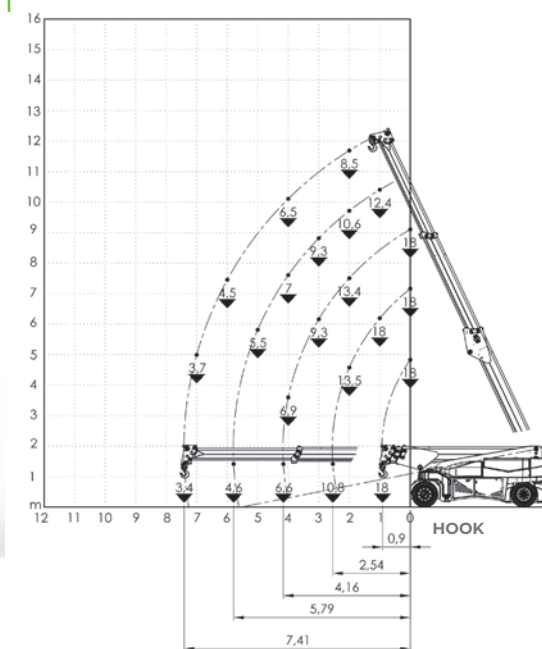


Technical features


Max Capacity kg	 18,000
Dimensions mm	 4535x1990x2000

	Front-wheels drive. 2 electric motors AC 10 kW 96V Insulation class H	LMI.	Electronic safe load indicator and tilting moment limiter
	Total Kg. 21,610 Removable counterweights Kg. 6,110		Automatic braking system on all wheels
	96 V - 1035 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 4 superelastic 355x50-20" Rear nr. 2 superelastic 355x50-20"		+65°/-6°
	Rear Steering angle -90°/+90°		Motor driven pump N°2 23 kW - 96 V AC, 16 kW - 96 V AC Insulation class H

FRONT COMPASS TYPE OUTRIGGERS

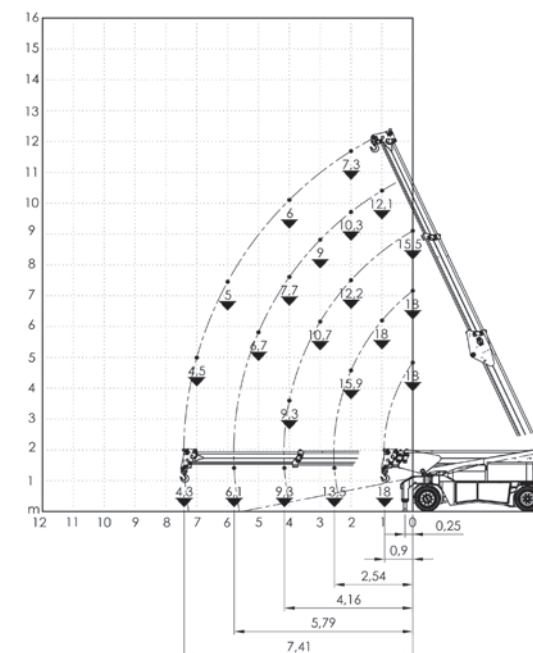

HYDRAULIC WINCH

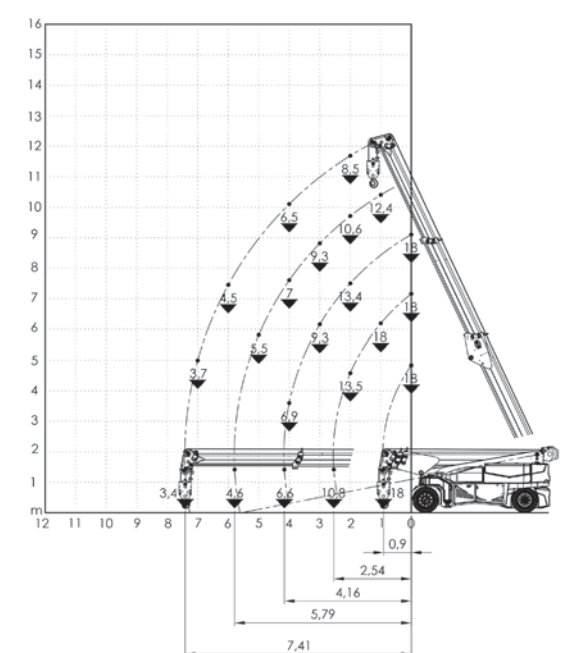

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

