

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Sito Nuovo 14

29010 Sarmato (PC) - Italy

t +39 0523 8486


e info@jmgcranes.com



Data subject to change without prior notice
Edition 04/2020 © 2020 JMG Cranes S.p.A. All rights reserved
Rev. 1 - 04/2020



Electric Pick & Carry Cranes

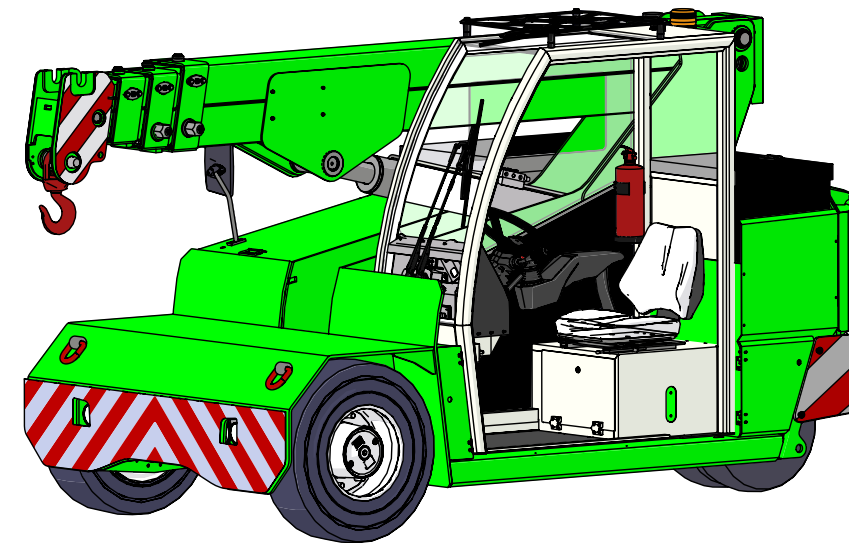


MC 60 (metric)
Max Capacity 6,000 kg

www.jmgcranes.com

JMG[®]
movetosolution

HYDRAULICALLY TELESCOPING SEQUENTIAL TYPE BOOM
FRONT-WHEELS DRIVE WITH COUNTER ROTATION
180° REAR STEERING

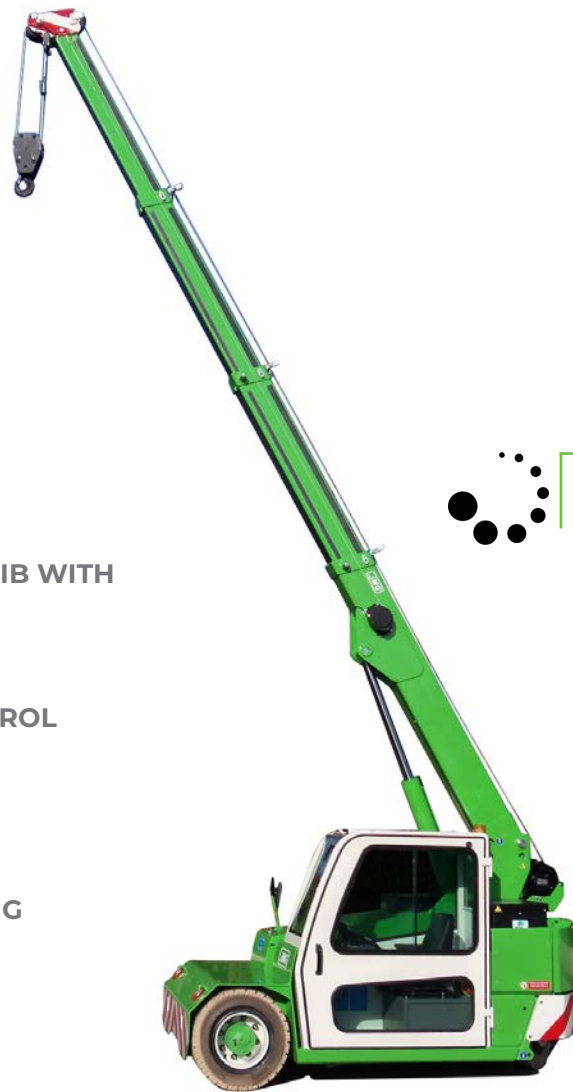

Options :

- HYDRAULIC WINCH
- HYDRAULIC FLY JIB
- BENDABLE MANUAL JIB WITH MANUAL EXTENSION
- NON-MARKING TIRES
- RADIO REMOTE CONTROL
- HYDRAULIC FORKS
- MAN BUCKET
- ATEX CONVERSIONS
- CUSTOMIZED PAINTING





Load charts



Technical features

Max Capacity kg		6,000		Total Kg. 6,500		Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
				72 V - 575 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
Dimension mm		3200x1650x1860		Front nr. 2 superelastic 250-15" Rear nr. 2 superelastic 21x8-9-15"		+60°/-15°
				Rear Steering angle -90°/+90°		Motor driven pump 1x12 kW-72 V AC

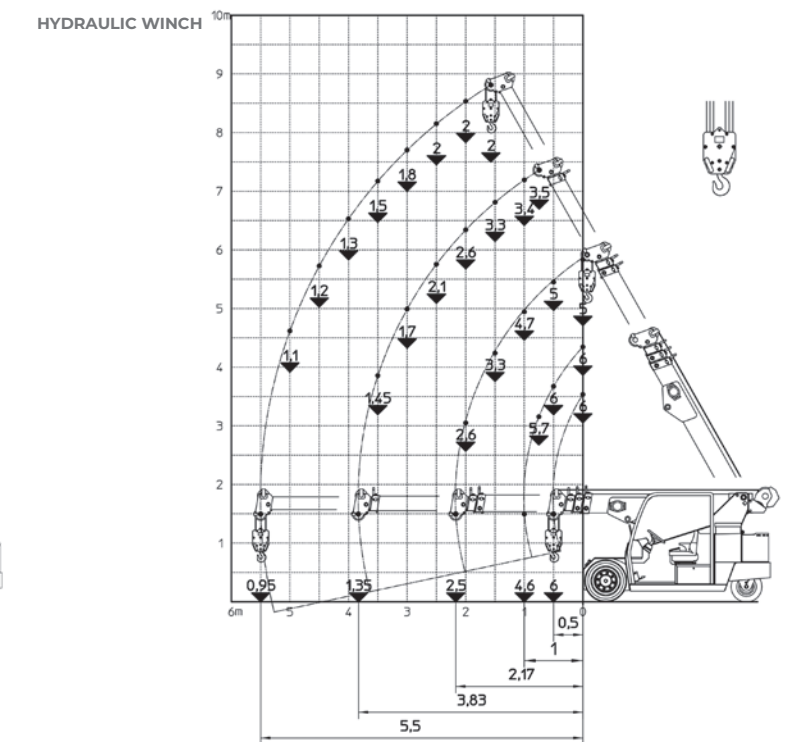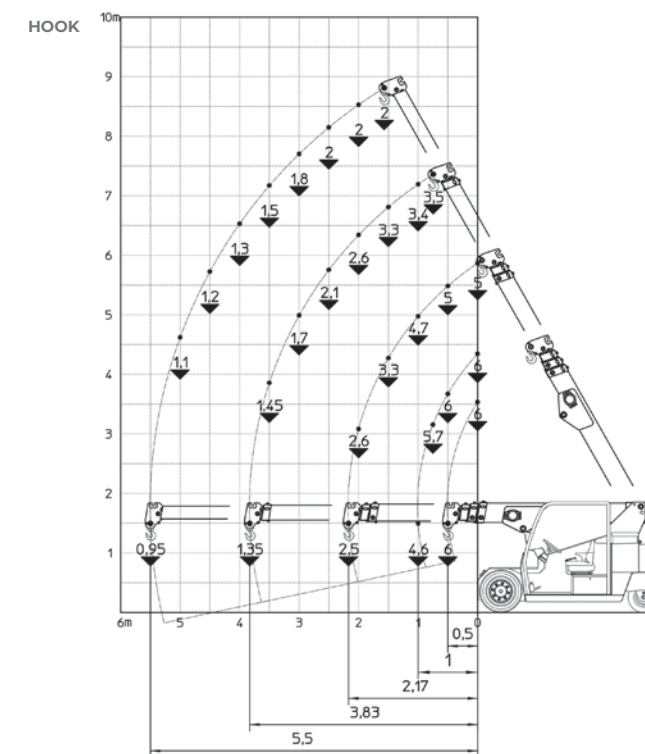

EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE-2014/35 UE- 2000/14 e and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

