

JMG Cranes S.p.A.

Sales & Service Office

Via Bergamo, 142

26100 Cremona - Italy

t +39 0372 1786738

Production Plant

Via Sito Nuovo 14

29010 Sarmato (PC) - Italy

t +39 0523 8486

e info@jmgcranes.com



Data subject to change without prior notice
Edition 04/2020 © 2020 JMG Cranes S.p.A. All rights reserved
Rev.1 - 04/20




Electric Pick & Carry Cranes



MC 85 (metric)
Max Capacity 8,500 kg

www.jmgcranes.com

JMG[®]
move to solution

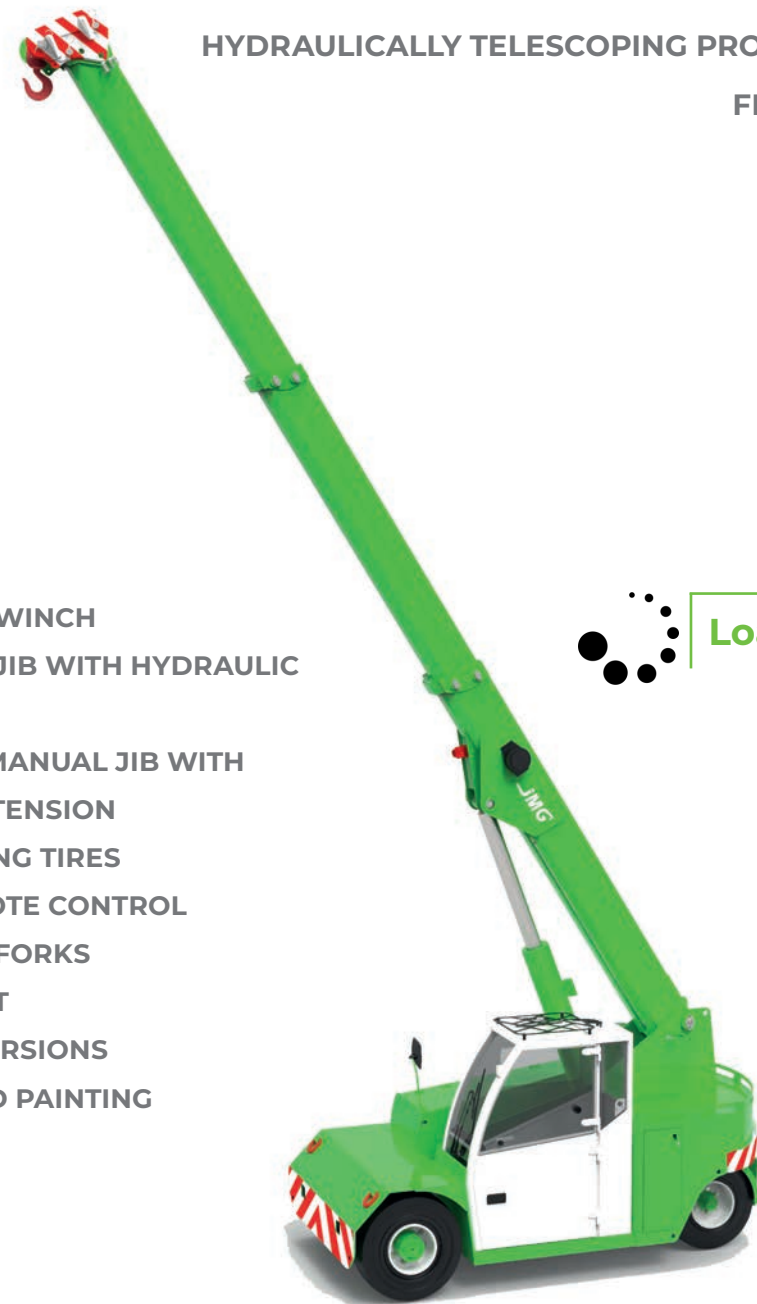

HYDRAULICALLY TELESCOPING PROPORTIONALLY TYPE BOOM

FRONT-WHEELS DRIVE WITH COUNTER ROTATION


180° REAR STEERING

Options :

- HYDRAULIC WINCH
- HYDRAULIC JIB WITH HYDRAULIC EXTENSION
- BENDABLE MANUAL JIB WITH MANUAL EXTENSION
- NON-MARKING TIRES
- RADIO REMOTE CONTROL
- HYDRAULIC FORKS
- MAN BUCKET
-  ATEX CONVERSIONS
- CUSTOMIZED PAINTING



Load charts

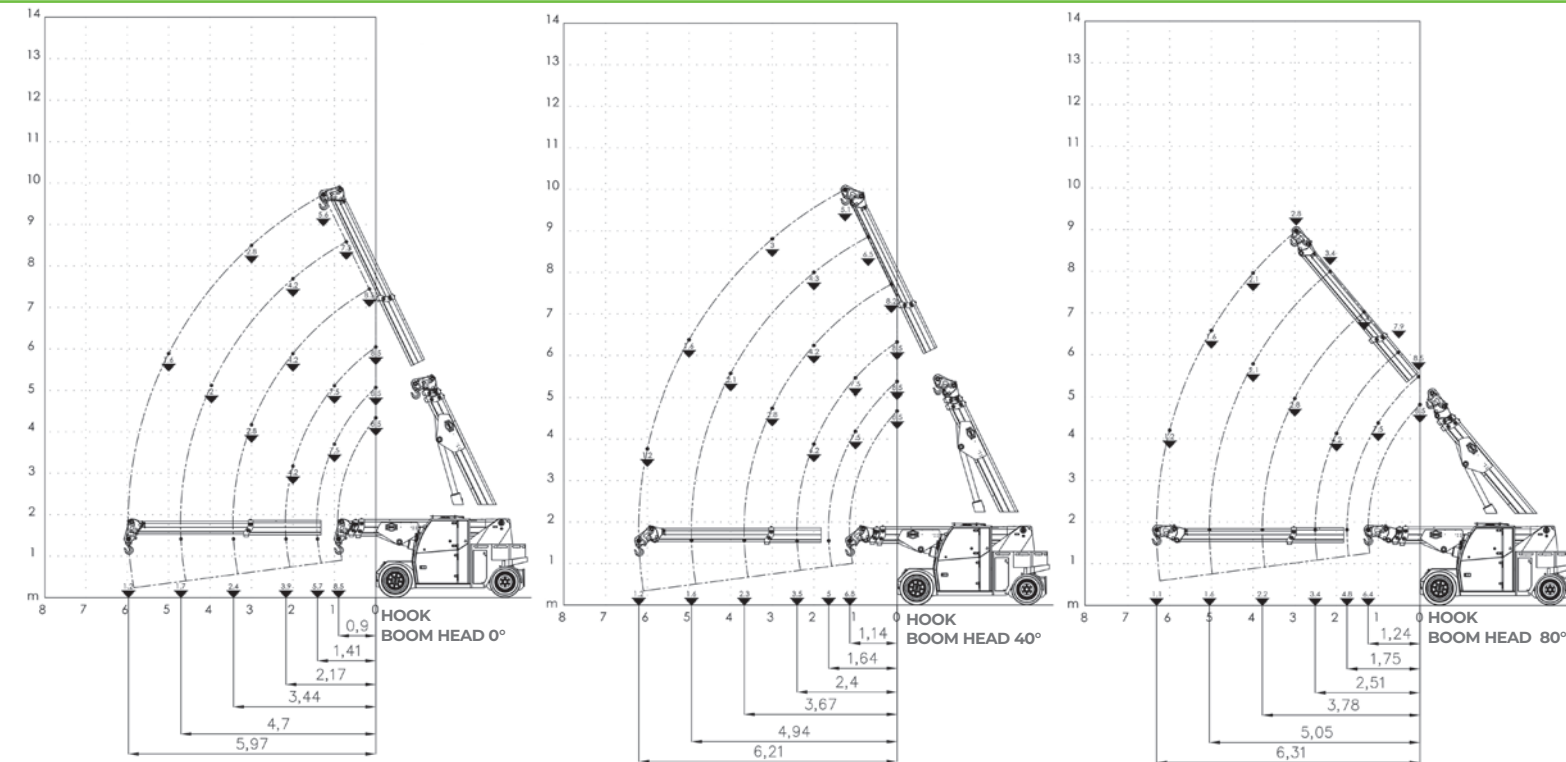

Technical features

Max Capacity kg



8,500

Dimension mm




3655x1700x1900

	Front-wheels drive. 2 electric motors AC 7,5 kW 72V Insulation class H		Electronic safe load indicator and tilting moment limiter
	Total Kg. 9,320		Hydraulically foot controlled service brake on all wheels, hydraulically automatic or button controlled parking brake on front wheels
	72 V - 620 Ah 8 working hours		Fabricated from preformed and welded quality steel plate
	Front nr. 2 superelastic 355x65/15" Rear nr. 2 superelastic 7.50/15"		+60°/-15°
	Rear Steering angle -90°/+90°		Motor driven pump 1x16 kW-72 V AC



EU Standards CE

	UNI ISO 4301-2: A1
	2006/42 CE-2014/30 UE- 2014/35 UE- 2000/14 and subsequent modifications
	EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications



Dimensions

