Data subject to change without prior notice
Edition 02/2026 © 2026 JMG Cranes S.p.A. All rights reserved
Rev. 00

EU standards CE

UNI ISO 4301-1: A1

2006/42 CE-2014/30 UE-2014/35 UE
2000/14 CE and subsequent amendments.

UNI EN 12999:2025
and subsequent amendments.

JMG Cranes S.p.A.

Offices and plant: Via dell'Innovazione, 3 - 29010 Sarmato (PC) - Italy

Registered Office: Via Dante, 15 - 26100 Cremona - Italy

Administration: Via Bergamo, 142 - 26100 Cremona - Italy

+39 0523 8486

info@jmgcranes.com

www.jmgcranes.com

Electric
pick & carry cranes



MC22500RE

(metric)

Maximum capacity
22,5 tm

MC22500RE


Features


- Carry deck slewing crane Radio remote controlled
- 4-section hydraulic sequential boom
- Front wheels drive with counter-rotation
- Hydraulic rotation of the boom on a slewing turret 360° continuous and unlimited
- Independent front and rear stabilizers


Optional

- Hydraulic winch
- Hydraulic jib with 3 extensions
- Men basket
- Customer paint colour

Load charts

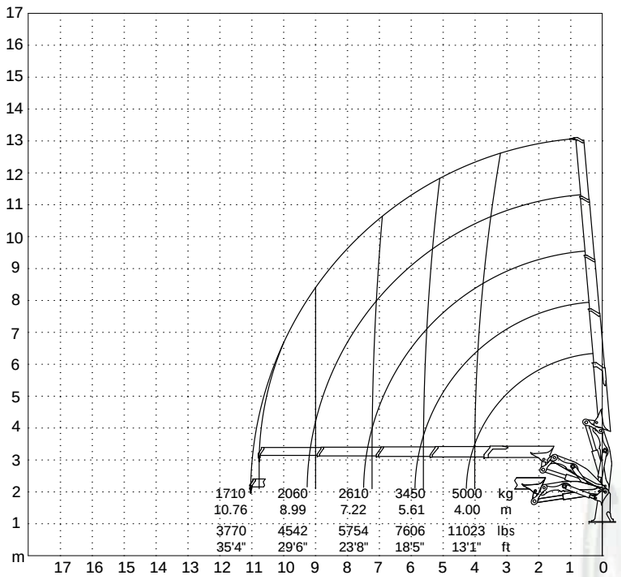


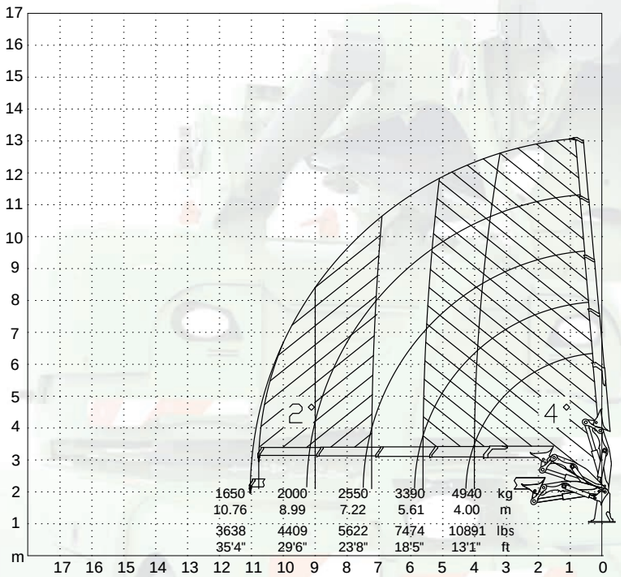




Hook open stab.

Winch open stab.





Technical features

Maximum capacity	22,5 tm
Dimensions mm	4.150x1.856x2.387

- Front wheels drive
  nr.2 electric motors 8,5kW 80V AC
- Total kg 13.150
- Armoured plate battery 80V 920 Ah
- nr.4 front superelastic 365-65-15”
  nr.2 rear superelastic 355-15”
- Rear steering
  Steering angle -70°/+70°
- L.M.I. Electronic safe load indicator and tilting moment limiter
- Automatic braking system
- Fabricated from preformed and welded quality steel plate
- Inclination angle 80°/-40°
  Rotation time 70s
- Electric motor 20kW 80V AC

Overall dimensions

